

# Stochastic Geometry and Random Graphs for the Analysis and Design of Wireless Networks

Martin Haenggi, *Senior Member, IEEE*, Jeffrey G. Andrews, *Senior Member, IEEE*, Francois Baccelli, Olivier Dousse, and Massimo Franceschetti

**Abstract**—Wireless networks are fundamentally limited by self-interference. Since the interference at a receiver critically depends on the locations of the interfering transmitters, mathematical techniques are needed to explicitly model the network geometry. As a consequence, *stochastic geometry* and the *theory of random geometric graphs* have emerged as essential tools in the analysis and design of large wireless systems. In the last decade, these techniques – including point process theory, percolation theory, and probabilistic combinatorics – have led to important results and insights such as the connectivity, capacity, and other fundamental limits of wireless networks, and the coverage of sensor networks.

This tutorial article gives an overview of the mathematical background of these techniques, provides models for large wireless networks, and presents some of the important results that were derived in the last decade. It also serves as an introduction to the field for the other papers in this special issue.

## I. INTRODUCTION

Emerging classes of large wireless systems such as ad hoc and sensor networks and cellular networks with multihop coverage extensions have been the subject of intense investigation over the last decade. In the process, researchers have realized that the classical methods for communication system and network analysis are insufficient to analyze these new types of networks. There are two main reasons: 1) The performance-limiting metric is the signal-to-interference-and-noise-ratio (SINR) instead of the just the SNR as in point-to-point systems or networks without spatial reuse. The interference is a function of the *network geometry* and the path loss and fading characteristics. 2) The amount of uncertainty present in the network. Due to the distributed nature of the system, it is impossible for the terminals to know the locations and channels of all but perhaps few nodes. Therefore there is a need for probabilistic models to describe the uncertainty and methods to derive performance metrics of interest.

The two main tools that have proved most helpful are stochastic geometry [1] and random geometric graphs [2]. Stochastic geometry provides the mathematical framework that permits averaging over all realizations of the network whose nodes are placed according to some distribution. Random geometric graphs capture the distance-dependence and randomness in the connectivity of the nodes.

This paper provides an introduction to stochastic geometry and random geometric graphs and discusses recent results that were enabled by these theories.

### A. The role of the geometry and the SINR

The interference  $I$  is governed by a number of stochastic processes, most notably the random node distribution, *i.e.*, the network geometry.

Consider the SINR expression for a receiver placed at the origin  $o$  in the 2 or 3-dimensional Euclidean space:

$$\text{SINR} = \frac{S}{W + I}, \quad \text{where} \quad I = \sum_{i \in \mathcal{T}} P_i h_i \ell(\|x_i\|), \quad (1)$$

where  $S, W$ , and  $I$  are the desired, noise, and interference powers, respectively. The summation for  $I$  is taken over the set of all interfering transmitters  $\mathcal{T}$ ,  $P_i$  is the transmit power,  $h_i$  is a fading random variable, and  $\ell$  is the path loss function, assumed to depend only on the distance  $\|x_i\|$  of the interferer situated at position  $x_i \in \mathbb{R}^d$ . In a large system, the unknowns are  $\mathcal{T}$ ,  $h_i$ , and  $x_i$ , and perhaps  $P_i$ . In an average sense, the impact of the fading is small, but the locations of the interfering nodes greatly influence the SINR levels. So, in essence, it is the *network geometry* or, more precisely, the *interference geometry*, that determines the distribution of the interference and the SINR and, in turn, the performance of the network. The geometry itself is a function of the underlying node distribution (and mobility pattern for mobile networks) and the channel access scheme.

The node distribution is captured by a stochastic *point process*. The most prominent example is certainly the homogeneous (or stationary) Poisson point process (PPP), for which a host of results have been derived in the last decade. Its nice analytical properties, most notably the independence between the nodes' positions, permit closed-form expressions in many cases. However, it is exactly this independence property that makes this model unsuitable for networks where coordinated node placement or movement is needed for the application. Efforts have been undertaken to extend results for the homogeneous PPP to other point process models, including clustered and so-called hardcore models where a minimum node separation is enforced, but they are still in their infancy.

### B. History and recent successes

Although there has been peaking interest in recent years in the use of stochastic geometry and random graph theory to describe wireless networks, some of the underlying approaches go back 100 years, or more. Wireless network performance is mostly interference-limited, and a large number of users contribute to the interference in vastly varying magnitudes, as described by the interference function stated in (1), which is a

*shot noise process*. In general, a shot noise process is described as

$$I(x) = \sum_{i=-\infty}^{\infty} g(x - x_i), \quad (2)$$

where  $\{x_i\}$  is a stationary Poisson process on  $\mathbb{R}$  and  $g(x)$  is the impulse response. If  $x$  is two-dimensional it can represent coordinates on the plane. Typically, in wireless networks  $g(x)$  follows a power law of the form  $K\|x\|^{-\alpha}$ , henceforth denoted as  $\ell(x)$ , in which case  $I(x)$  is the aggregate interference received at point  $x$ . The shot noise process has been studied at least dating to Campbell in 1909 [3], who characterized its mean and variance, more fully by Schottky in 1918 [4], while Rice performed extensive investigations on the distribution of  $I(x)$  from 1940 through 1970 [5]. Power law shot noise – most relevant here – was considered by Lowen and Teich in 1990 [6].

Stochastic geometry combines the shot noise process with stochastic point processes, that is, the values of  $x_i$  are drawn from a statistical distribution, most commonly the homogeneous PPP as just discussed. Stochastic geometry in its early form has been used as a tool for characterizing interference in wireless networks at least as early as 1978 [7], and was further advanced by Sousa and Silvester in the early 1990s [8]–[10]. By the early 90’s, two useful mathematics texts were available to researchers: Stoyan et al.’s stochastic geometry first edition in 1987 [1] and Kingman’s Poisson Process [11]. In the late 1990’s, Ilow and Hatzinakos [12] characterized the impact of random channel effects – fading, shadowing, path loss, and combos thereof – on the aggregate co-channel interference, while Baccelli et al. also began developing tools primarily based on Poisson Voronoi tessellations and Delaunay triangulations for the optimization of hierarchical networks [13], [14] and of mobility management in cellular networks [15]. For a survey on this line on thought, see the forthcoming book chapter by S. Zuyev [16].

In the past ten years, stochastic geometry and associated techniques have been applied and adapted to cellular systems [17]–[20], ultrawideband [21], cognitive radio [22], femtocells [23], relay networks [24], and many other types of wireless systems. However, perhaps the largest impact has come in the area of ad hoc networks, which are fully distributed and in which all participating nodes – both transmitters and receivers – are randomly located. In such networks, it is impossible even with unlimited overhead to control the SINRs of all users, due to the coupling of interference: if one user raises its power, it causes an interference increase to all other communicating pairs. Therefore, the geometry is of utmost importance since it is the first-order determinant of the SINR and hence capacity and reliability.

Considerable efforts have been undertaken in the past decade to better understand the properties of distributed wireless networks in the context of their geometry, resulting in many new tools that researchers can use to characterize their performance and predict the relative performance of communication protocols. This paper attempts to distill out many of these contributions.

### C. Paper overview and organization

The goal of this paper is to provide a primer on stochastic geometry and random graphs, and to bring some of the main tools and results as they apply to wireless networks together in a single summary article. In §II, we provide an overview of the key mathematical tools, including point processes, random geometric graphs, and percolation. In §III, the interference function – which is the key quantity in a wireless network – is characterized and it is shown that outage probability is a natural metric in a spatially stochastic wireless network. We then move on to other important performance metrics, such as the connectivity of the network and its coverage in §IV, and the data-carrying capacity and area spectral efficiency of the network in §V. We conclude by providing some additional applications of these results, including epidemic models, wireless security, and transmission protocol design.

**We will refer throughout the introduction to other papers in the special issue, noting how they tie in.**

## NOTATION AND SYMBOLS

Symbol	Definition/explanation
$[k]$	the set $\{1, 2, \dots, k\}$
$\mathbb{Z}, \mathbb{N}$	integers, positive integers
$\mathbb{R}, \mathbb{R}^+$	real numbers, positive real numbers
$\mathbf{1}_A(x)$	indicator function
$u(x)$	$\triangleq \mathbf{1}_{\{x \geq 0\}}(x)$ (unit step function)
$d$	number of dimensions of the network
$\#A$	cardinality of $A$
$\mathbb{P}(A)$	probability of event $A$
$\mathbb{E}(X)$	expectation of random variable $X$
$\mathcal{L}_X(s) = \mathbb{E}(e^{-sX})$	Laplace transform of random variable $X$
$ \cdot $	Lebesgue measure
$o$	origin in $\mathbb{R}^d$
$B$	a Borel subset of $\mathbb{R}$ or $\mathbb{R}^d$
$B(x; r)$	ball of radius $r$ centered at $x$
$c_d$	$\triangleq \pi^{d/2} / \Gamma(1 + d/2)$ (volume of the $d$ -dim. unit ball)
$\alpha$	path loss exponent
$F_X(x) = \mathbb{P}(X \leq x)$	distribution of random variable $X$ (cdf)
$\Phi = \{x_i\} \subset \mathbb{R}^d$	point process
$\Lambda, \lambda$	counting measure and density for $\Phi$
$p_c, \lambda_c$	critical probability, density for percolation
$h$	(power) fading random variable ( $\mathbb{E}(h) = 1$ )
$T \in \mathbb{R}^+$	SIR or SISR threshold for successful communication
$\epsilon \in (0, 1)$	target outage probability for transmission capacity
$\ell : \mathbb{R} \rightarrow \mathbb{R}^+$	(isotropic) large-scale path loss function
$W$	thermal noise

## II. MATHEMATICAL PRELIMINARIES

Stochastic geometry [1] is a rich branch of applied probability which allows one to study random phenomena on the plane or in higher dimensions. It is intrinsically related to the theory of point processes [25]. Initially its development was stimulated by applications to biology, astronomy and material sciences. Nowadays, it is also used in image analysis and in the context of communication networks.

### A. Point processes

The most basic object studied in classical stochastic geometry are multidimensional point processes. A point process (PP) is a measurable mapping  $\Phi$  from some probability space to the space of point measures (a point measure is a measure which is locally finite and which takes only integer values) on some

space  $E$ . Each such measure can be represented as a discrete sum of Dirac measures on  $E$ :

$$\Phi = \sum_i \delta_{X_i}.$$

The random variables  $\{X_i\}$ , which take their values in  $E$  are the points of  $\Phi$ . Most often, the space  $E$  is the Euclidean space  $\mathbb{R}^d$  of dimension  $d \geq 1$ . In some cases, it is important to be in a position to consider point processes on more general topological spaces (see below). The *intensity measure*  $\Lambda$  of  $\Phi$  is defined as  $\Lambda(B) = \mathbb{E}\Phi(B)$  for Borel  $B$ , where  $\Phi(B)$  denotes the number of points in  $\Phi \cap B$ .

Here are a few basic dichotomies concerning point processes on some Euclidean space  $\mathbb{R}^d$ :

- A PP can be simple or not. It is simple if the multiplicity of a point is 1 at most.
- A PP can be Poisson or not. The popularity of the Poisson point process (PPP) stems from the handy computational framework it offers. A definition is given in the following subsection.
- A PP can be *stationary* or not. Stationarity holds if the law of the point process is invariant by translation.
  - The homogeneous PPP is stationary. This is the simplest point process in a sense.
  - The framework for non-stationary PPPs is quite handy, although a bit more technical than that of the homogeneous case.
  - There is a general and comprehensive computational framework for stationary point processes which are not Poisson. This is Palm calculus (see below).
- A point process can be *isotropic* or not. Isotropy holds if the law of the PP is invariant to rotation. The homogeneous PPP is isotropic. If a PP is isotropic and stationary, it is called *motion-invariant*.
- A PP can be marked or not; typically the marks are independent of the PP and i.i.d. There are much more general marks of a PP like the Voronoi cells of the points or the universal marks of a point (see below). General marks require the handling of Palm calculus in one way or another.

1) *Poisson point processes*: Let  $\Lambda$  be a locally finite measure on some metric space  $E$ . A point processes  $\Phi$  is Poisson on  $E$  if

- For all disjoint subsets  $A_1, \dots, A_n$  of  $E$ , the random variables  $\Phi(A_i)$  are independent;
- For all sets  $A$  of  $E$ , the random variables  $\Phi(A)$  are Poisson.

A key property states that conditionally on the fact that  $\Phi(A) = n$ , these  $n$  points are independently located in  $A$ . This leads to an explicit representation of the Laplace functional of  $\Phi$ . If  $E = \mathbb{R}^d$ , this Laplace functional is defined for general point processes  $\Phi$  by

$$\mathcal{L}_\Phi(f) \triangleq \mathbb{E} \left[ e^{-\int_{\mathbb{R}^d} f(x) \Phi(dx)} \right] = \mathbb{E} \left[ e^{-\sum_{X \in \Phi} f(X)} \right],$$

where  $f$  is a non-negative function on  $\mathbb{R}^d$ . In the Poisson case,

$$\mathcal{L}_\Phi(f) = e^{-\int_{\mathbb{R}^d} (1 - e^{-f(x)}) \Lambda(dx)}. \quad (3)$$

This is the basis of a large number of formulas like e.g. those on the Laplace transform of the shot noise (see below). Other appealing features of PPPs are their invariance by a large number of key operations. In particular,

- The superposition of two or more independent PPPs (which is defined as the sum of the associated point measures) is again a PPP; this can be extended to denumerable sums under some conditions.
- The independent thinning of a PPP is again a PPP; this can be extended to the case of location-dependent thinning, where a point is retained or not depending on its location.
- The point process obtained by displacing point  $X_i$  independently of everything else according to some Markov kernel  $K(X_i, \cdot)$  that defines the distribution of the displaced position of the point  $X_i$  yields another PPP; this result is often referred to as the displacement theorem.

In each case, the intensity of the resulting PPP can be obtained in closed form from that of the initial PPP and the involved transformations (e.g., the thinning probability or the kernel  $K$ ). If  $\rho(x, \cdot)$  is the probability density pertaining to the Markov kernel applied to a PPP of intensity  $\lambda(x)$  on  $\mathbb{R}^d$ , the displaced points form a PPP of intensity

$$\lambda'(y) = \int_{\mathbb{R}^d} \lambda(x) \rho(x, y) dx.$$

In particular, if  $\lambda(x)$  is constant  $\lambda$  and  $\rho(x, y)$  is a function of  $y - x$  only, then  $\lambda'(y) = \lambda$  for all  $y$ .

A striking property of PPPs is Slivnyak's theorem which states that the law of  $\Phi - \delta_x$  conditional on the fact that  $\Phi$  has a point at  $x$  is the same as the law of  $\Phi$ . In mathematical terms, the reduced Palm probability  $P^{x!}$  of a PPP is the distribution of this Poisson point process itself. This is usually expressed as  $P^{x!} = P$ , for all points  $x \in \Phi$ . This means that the properties seen from a point  $x \in \mathbb{R}^d$  are the same whether we condition on having a point  $x \in \Phi$  or not — if the point at  $x$  is not considered. For example, we have for the mean number of points within distance  $r$  of  $x$ :

$$\mathbb{E}\Phi(B(x; r) \setminus \{x\}) = \mathbb{E} \left( \Phi(B(x; r) \setminus \{x\}) \mid x \in \Phi \right) = \Lambda(B(x; r)),$$

where  $b(x, r)$  is the ball of radius  $r$  centered at  $x$ .

2) *Stationary point processes*: The theory of stationary point processes is based on the concept of marks and on the Matthes definition of Palm probability [25] and [26].

Roughly speaking, a mark of some point of a stationary point process is a quantity that “follows this point” when the collection of points is transported by a global translation operation. For instance, the local configuration of neighbors of point  $X$ , which is defined as the collection of points in a ball of radius  $R$  centered at  $X$  is a mark of this point. If  $R$  is infinity, this mark is the universal mark of  $X$ , namely ‘the point process seen from  $X$ ’.

The Palm probability  $P^0$  of a stationary point process is the law of this universal mark, which can be shown to be the same for all points. It can be understood as the law of the point process given that it has a point at the origin. As defined here  $P^0$  is a probability on the space of point measures.

Campbell's formula for stationary point processes, which is a direct consequence of the last definition, states that when denoting by  $\Phi - x$  the global translation of all points of  $\Phi$  by the vector  $x$ , then

$$\mathbb{E} \left[ \sum_{X \in \Phi} f(X, \Phi - X) \right] = \int_{\mathcal{N}} \int_{\mathbb{R}^d} f(x, \phi) \lambda dx P^0(d\phi), \quad (4)$$

where  $\mathcal{N}$  is the space of simple point sequences, for all positive functions  $f(x, \phi)$  of  $x \in \mathbb{R}^d$  and  $\phi$  a point measure on  $\mathbb{R}^d$ . Here  $\lambda$  is the intensity of  $\Phi$ , that is the mean number of points per unit space. The last formula is the key tool for computing the mean values of sums on the points of a stationary point process. Applied to PPPs, they are particularly simple. Let  $\Phi$  be a stationary PPP of intensity  $\lambda$  on  $\mathbb{R}^d$ . Then for non-negative  $f$ ,

$$\mathbb{E} \left( \sum_{X \in \Phi} f(X) \right) = \lambda \int_{\mathbb{R}^d} f(x) dx \quad (5)$$

and

$$\text{var} \left( \sum_{X \in \Phi} f(X) \right) = \lambda \int_{\mathbb{R}^d} f^2(x) dx. \quad (6)$$

Important examples of stationary point processes that lead to nice computational results include

- point processes with repulsion, *e.g.*, Matérn hard core point processes or determinantal point processes;
- point processes with attraction, *e.g.*, Neyman-Scott cluster processes, permanental point processes [27] or Hawkes point processes [28].

For more on this, see [25] and [1].

## B. Boolean models and random geometric graphs

1) *The germ-grain model:* The most celebrated model of stochastic geometry is the Boolean or germ-grain model. It is directly related to random geometric graphs. It is also a basic model of continuum percolation.

In the simplest setting, the Boolean model is based on a Poisson point process  $\Phi$ , the points of which,  $\{X_i\}$ , are also called *germs* and on an independent sequence of i.i.d. compact sets  $\{K_i\}$  called the *grains*. Formally, the Boolean model is

$$\Xi = \bigcup_i (X_i + K_i)$$

where  $X_i + K_i = \{X_i + y, y \in K_i\}$ .

There is a beautiful representation of  $\Xi$  as a Poisson point process on the space of *closed sets* of  $\mathbb{R}^d$ . This set, endowed with a proper topology, can be made a metric space and one can in fact define Poisson point processes on this space [29].

The Poisson set of germs and the independence of the grains make the Boolean model analytically tractable. It is often considered as the null hypothesis in stochastic geometry modeling.

Among the key results on this model, let us quote

- Coverage: the simplest coverage question is the distribution of the number of grains that intersect a given compact set, for instance a given location of the space. This distribution is Poisson.

- Volume fraction: in the homogeneous case, what is the fraction of a big ball which is covered by grains? This can be derived using the analysis of coverage and an ergodic theorem.
- Contact distribution: given that a location is not covered, what is the radius of the biggest ball (resp. length of the longest segment of orientation  $\theta$ ) centered at this location that does not intersect any grain of the Boolean model?

These questions extend to many other models, either with non-Poisson germs, or with Poisson germs but grains that are not i.i.d. An interesting example considered in [30] is that where the grains are SINR cells, namely the region of the space around a transmitter where the SINR w.r.t. this transmitter exceeds a given threshold. Here the interference is the field created by the other points of the Poisson point process.

2) *The disk graph:* Assume that the compact sets of the last subsection are all balls of radius  $r/2$ . We define the disk graph of a Poisson point  $\Phi$  process of intensity  $\lambda$  with range  $r$ , denoted as  $G_{\lambda, r}$  as the graph with nodes the points of  $\Phi$  and with edges between  $X$  and  $Y$  if the two grains touch, *i.e.*, if  $\|X - Y\| \leq r$ . This is the most basic random geometric graph and a central object of random graph theory. The following questions are of particular interest within this setting:

- Does this random graph has an infinite component? This is of course equivalent for  $\Xi$  to have an infinite component. This property is referred to as percolation. A striking fact is that there is a deterministic  $0 < r^* < \infty$  such that when  $r < r^*$ , there is no such infinite component with probability 1 (*i.e.*, there is no percolation for all realizations of  $\Phi$ ), whereas when  $r > r^*$ , there is an infinite component with probability 1 (*i.e.*, there is percolation for all realizations of  $\Phi$ ). This will be proven in §IV-C.
- In case of percolation, what is the fraction of nodes included in the infinite component? In case of no percolation, what is the typical size of a component?

The main tool for addressing these continuum percolation questions is a reduction to discrete bond or site percolation. For more on the matter, see [31] and [32].

## C. Voronoi tessellation

By definition, a tessellation is a collection of open, pairwise disjoint polyhedra (polygons in the case of  $\mathbb{R}^2$ ) whose closures cover the space, and which is locally finite (*i.e.*, the number of polyhedra intersecting any given compact set is finite).

Given a simple point measure (or point sequence)  $\phi$  on  $\mathbb{R}^d$  and a point  $x \in \mathbb{R}^d$ , we define the *Voronoi cell*  $\mathcal{C}_x(\phi)$  of the point  $x \in \mathbb{R}^d$  w.r.t.  $\phi$  to be the set

$$\mathcal{C}_x(\phi) = \{y \in \mathbb{R}^d : \|y - x\| < \inf_{x_i \in \phi, x_i \neq x} \|y - x_i\|\}. \quad (7)$$

Given a simple point process  $\Phi = \sum_i \delta_{x_i}$  on  $\mathbb{R}^d$ , we define the *Voronoi tessellation* or *mosaic* generated by  $\Phi$  to be the marked point process

$$\mathcal{V} = \sum_i \delta_{(x_i, \mathcal{C}_{x_i}(\Phi) - x_i)}.$$

The *Delaunay triangulation* generated by a simple point measure  $\phi$  is a graph with the set of vertices  $\phi$  and edges connecting each  $y \in \phi$  to any of its Voronoi neighbors.

The Delaunay triangulation of a Poisson point process is an object of central importance in communications. In a regular periodic (say hexagonal or triangular) grid it is obvious how to define the neighbors of a given vertex. However, for irregular patterns of points like a realization of a PPP, which is often used to model set of nodes in mobile ad hoc networks, this notion is much less evident. The Delaunay triangulation offers some purely geometric definition of neighborhood in such patterns.

For quantitative properties of Poisson–Voronoi tessellations (mean cell size, mean number of sides of the cell, etc.) and Poisson–Delaunay graphs (mean degree, mean length of a typical edge, mean size of a typical triangle) see, e.g., [33]. In [13], [14], [34] Voronoi tessellation-based models of cellular access network were considered to derive closed-form expressions for the mean number of users in a cell, the mean length of connections, and the total power received at the base station.

### III. INTERFERENCE CHARACTERIZATION AND OUTAGE

In this section we apply some of the techniques introduced above to study the interference in large ad hoc networks and the outage probability of a given link.

#### A. Interference

What can be said of the total interference power measured at a point  $x$  in the network, given by

$$I(x) \triangleq \sum_{y \in \Phi_t} \ell(\|x - y\|),$$

where  $\Phi_t$  is a point process of transmitters (assumed to be interferers) on  $\mathbb{R}^2$ ?  $\Phi_t$  is typically a subset of a larger point process  $\Phi$  since it constitutes the nodes selected by the MAC scheme to transmit concurrently. For example, if nodes in a PPP of intensity 1 transmit independently and randomly with probability  $p$  (slotted ALOHA),  $\Phi_t$  is a PPP with intensity  $p$ . In this case of a uniform PPP, due to Slivnyak's result (see §II-A1),  $I(x)$  does not depend on  $x$ ; in particular, it does not matter whether  $x$  is part of the underlying point process  $\Phi$  or not (as long as its contribution to  $I$  is not considered if  $\Phi_t$  is conditioned on having a point at  $x$ ). In most other cases, however, it does, since the interference seen by a typical point of the point process differs from the interference seen at an arbitrary point of the plane.

As mentioned in Section I-B, researchers have found an analogy to *shot noise processes* to analyze the distributional properties of  $I(x)$  [5], [35], [36]. Here we are using this insight to derive the Laplace transform of the interference.

Let  $\Phi \triangleq \{r_i = \|x_i\|\}$  be the distances of the points of a  $d$ -dimensional uniform PPP of intensity  $\mu$ . Then  $\Phi$  is an inhomogeneous PPP with intensity function  $\lambda(r) = \mu c_d r^{d-1}$ , where  $c_d = |b(o, 1)|$  is the volume of the  $d$ -dimensional unit ball. Considering the interference as a shot noise process (2), we can identify the path loss law  $\ell(r) = h_r r^{-\alpha}$  for i.i.d.  $h$

with the impulse response of the shot noise process. We would like to calculate the Laplace transform

$$\mathcal{L}_I(s) \triangleq \mathbb{E}[e^{-sI}] = \mathbb{E} \left[ \exp \left( -s \sum_{r \in \Phi} h_r r^{-\alpha} \right) \right]$$

of the interference. This is a Laplace functional with  $f = s\ell(r) = sh_r r^{-\alpha}$ , so we have from (3)

$$\begin{aligned} \mathcal{L}_I(s) &= \exp \left\{ - \int_0^\infty \mathbb{E}_h [1 - e^{-sh_r r^{-\alpha}}] \lambda(r) dr \right\} \\ &= \exp \left( - \mu c_d \mathbb{E}[h^\delta] \Gamma(1 - \delta) s^\delta \right), \end{aligned} \quad (8)$$

where  $\delta \triangleq d/\alpha$ . Note that this expression is only valid for  $\delta < 1$ . So:

- For  $\alpha \leq d$ , we have  $I = \infty$  a.s. This is a consequence of the cumulated interference from the many far transmitters whose signal powers do not decay fast enough to keep the interference power finite. For a finite network, the interference would be finite.
- For  $\alpha > d$  we have  $I < \infty$  a.s. but  $\mathbb{E}(I) = \infty$  due to the singularity of the path loss law at the origin. Even if we consider only the nearest interferer,  $\mathbb{E}(I)$  is infinite. If a bounded path loss law is used, all moments exist.

In the important case of Rayleigh fading,  $\mathbb{E}[h^\delta] = \Gamma(1 + \delta)$ , so, using the properties of the gamma function, we obtain the closed-form result

$$\mathcal{L}_I(s) = \exp \left( - \mu c_d s^\delta \frac{\pi^\delta}{\sin(\pi\delta)} \right).$$

So the interference has a *stable distribution* with characteristic exponent  $\delta$  and dispersion  $\mu c_d \mathbb{E}[h^\delta] \Gamma(1 - \delta)$ . Since  $\delta < 1$ ,  $I$  does not have any finite moments.

A closed-form expressions for the interference distribution only exists for  $\delta = 1/2$ ; this is the inverse Gaussian or Lévy distribution, as has been established in [37].

Using the distribution of the distances to the  $n$ -th nearest neighbor [38], the distributions of the interference (without fading) from the  $n$ -th nearest neighbor are easily found. The tail probabilities do not depend on the presence or type of fading and are given by

$$\mathbb{P}(I_n > x) \sim \frac{1}{n!} (\lambda c_d)^n x^{-n\delta}, \quad x \rightarrow \infty.$$

This means that  $\mathbb{E}(I_n^p)$  exists for  $p < n\delta$ . For example, if interference-canceling techniques are used and the interference from the  $k$  nearest interferers can be cancelled, we need  $k > \alpha$  in two-dimensional networks to have a finite second moment.

If the non-singular path loss model  $g(x) = (1 + \|x\|)^{-\alpha}$  is used, the tail probability of the interference reflects the tail probability of the fading process: If the fading has an exponential or power-law tail, so does the interference. This holds for general motion-invariant processes [39].

#### B. Outage

An *outage* of a wireless link is said to occur when a packet transmission fails. In many situations, it is justified to equate the outage event to the event that SINR  $< T$  for some threshold

$T$  that depends on the physical layer parameters such as rate of transmission, modulation, and coding. The complementary probability is the success probability  $p_s \triangleq \mathbb{P}(\text{SINR} \geq T)$ .

In the case where the desired signal  $S$  is subject to Rayleigh fading, we obtain for the outage over a link of distance  $r$

$$p_s = \mathbb{P}(S > T(W + I)) = \exp\left(\frac{Tr^\alpha W}{P}\right) \mathbb{E}(e^{-Tr^\alpha I}). \quad (9)$$

The first term only depends on the noise (or SNR), while the second only depends on the interference (or SIR). Focusing on this interference term we notice that this is the Laplace transform of the interference evaluated at  $s = Tr^\alpha$ . So, in a  $d$ -dim. interference-limited network whose nodes are distributed as a uniform PPP of intensity  $\lambda$  with ALOHA channel access with probability  $p$ , the outage probability is given by (8), replacing  $s$  by  $T$ :

$$p_s = \exp\left(-\lambda p c_d r^d \mathbb{E}[h^\delta] \Gamma(1 - \delta) T^\delta\right) \quad (10)$$

Here we have used the fact that ALOHA channel access performs independent thinning of the PPP, which results in a PPP of lower intensity. The interferers' channels may be subject to a different type of fading (or no fading), all that matters is  $\mathbb{E}[h^\delta]$ .

The elegant equivalence of Laplace transforms and success probabilities has been pointed out in [40]–[42], and in [42] several generalizations can be found.

### C. Throughput

The transmission success probability in the previous subsection is derived assuming that the desired transmitter transmits while the receiver listens. To optimize the network parameters, such as the ALOHA transmit probability  $p$ , the unconditioned success probabilities must be considered. In the case of ALOHA and half-duplex transceivers, the *spatial throughput* is  $p(1 - p)p_s(p)$ . Finding the optimum  $p$  means finding the optimum trade-off between spatial reuse (a larger  $p$  results in a higher density of concurrent transmissions) and success probabilities (a larger  $p$  results in higher interference and thus a lower success probability). In [42], a related metric, the *spatial density of success*  $pp_s$  is optimized in function of  $p$ . In some cases, the optimal value, which is known in closed form, does not depend on the intensity  $\lambda$  of the underlying point process.

The same framework can also be used to find the optimum value for the SINR threshold  $T$  that maximizes the *area spectral efficiency*. A larger  $T$  permits higher transmission rates (or spectral efficiencies if normalized by the bandwidth) but results in lower success probabilities (see further discussion in Section V-B). Similarly, the *probabilistic progress*, usually defined as the product of distance times success probability can be maximized by finding the optimum link distance  $r$ . Choosing a larger  $r$  may increase the progress but comes with the disadvantage of a lower success probability [43]. In [42], an expression for progress based on extremal shot noise is derived. **Add Baccelli et al. reference in this issue if accepted.**

## IV. PERCOLATION AND CONNECTIVITY

### A. Introduction

Percolation theory was originally introduced to model the porosity of materials. It has since then developed into a lively branch of probability. More recently, percolation models have been used to model the connectivity of wireless multi-hop networks.

The main property of percolation models is that they exhibit a *phase transition* in their connectivity behavior: depending on some (continuous) parameters, the components of the model are either all finite (*sub-critical* case) or one giant component forms (*super-critical* case). In the context of networking, such a transition affects the performance of the system greatly: without a giant component, the network would be completely fragmented and unusable. It is therefore of prime importance to characterize the conditions under which the network is super-critical. In this section, we cover some basics of percolation theory, starting with the simplest models and proof techniques, and then moving on to models that are more appropriate for wireless networks.

Percolation theory deals mostly with models of infinite size. We start with these classical models and briefly address finite networks.

### B. Discrete percolation: Bond percolation in infinite lattices

The bond percolation model is defined as follows: consider the infinite square lattice  $\mathbb{Z}^2$  and connect each pair of nearest neighbors independently with probability  $p$ . Then define the component (or *cluster*) of the origin  $C$  as the set of elements of  $\mathbb{Z}^2$  that are connected to the origin by a sequence of adjacent edges. We define the *percolation probability* as

$$\theta(p) := \mathbb{P}(\#C = \infty).$$

The central result of percolation theory is the following:

**Theorem 1 (Broadbent and Hammersley [44])** *There exists a number  $0 < p_c < 1$  such that  $\theta(p) = 0$  for  $p < p_c$  and  $\theta(p) > 0$  for  $p > p_c$ .*

In the particular case of bond percolation on  $\mathbb{Z}^2$ , the exact value of  $p_c$  is known to be  $1/2$  [45]. Other specific cases and properties of  $\theta(p)$  can be found in [32]. To prove Theorem 1, we need first to observe that  $\theta(p)$  is an increasing function. Although this is a very intuitive property, its proof is not so trivial (see, e.g., [31, Ch. 2.2] for a general method). It is then enough to prove that there exists some probability  $p_1 > 0$  such that  $\theta(p_1) = 0$  and some probability  $p_2 < 1$  such that  $\theta(p_2) > 0$ . The following two sections are devoted to finding  $p_1$  and  $p_2$ .

1) *Absence of percolation for small values of  $p$* : We start from the observation that if the origin belongs to an infinite cluster, then for any integer  $n$ , one can find in the lattice a self-avoiding path of length  $n$  starting at the origin. Thus we have

$$\theta(p) \leq \mathbb{P}(\exists \text{ a path of length } n \text{ starting at } o) \quad \forall n. \quad (11)$$

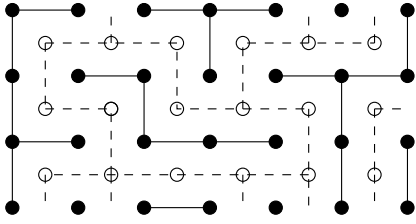


Fig. 1. A realization of the bond percolation model on  $\mathbb{Z}^2$  (plain lines) and its dual (dotted lines).

If all direct neighbors of  $\mathbb{Z}^2$  were connected by an edge, the number  $\kappa(n)$  of such path would be bounded from above by  $4 \cdot 3^{n-1}$ . Since edges are present with probability  $p$ , each of these  $\kappa$  paths exists with probability  $p^n$ . Using the union bound, we find that

$$\mathbb{P}(\text{there exists a path of length } n \text{ starting at } o) \leq 4p(3p)^{n-1}.$$

If  $p < 1/3$ , this quantity tends to zero when  $n$  increases, so that (11) implies  $\theta(p) = 0$ . So we have established that  $p_c \geq 1/3$ .

2) *Existence of an infinite cluster for sufficiently large  $p$* : Our proof relies on the classical Peierls argument [46]. Consider the dual lattice of  $\mathbb{Z}^2$ , which consists of vertices that are shifted by half a unit in both directions, as depicted in Figure 1. An edge is placed between two direct neighbors of the dual lattice if it does not intersect an edge of the direct lattice.

The key observation is that if a component is finite in the original lattice, it is necessarily surrounded by a circuit in the dual lattice. To prove that a vertex (e.g. the origin) belongs to an infinite cluster with positive probability, it is thus enough to show that the probability that a circuit surrounds the origin in the dual lattice is less than one. Let us estimate the number  $\sigma(n)$  of possible circuits of length  $2n$  that surround the origin: it is easy to see that it is bounded by

$$\sigma(n) \leq (n-1) \cdot 3^{2(n-1)}$$

Therefore, the probability that there exists a circuit around the origin with all edges closed upper bounded by

$$\begin{aligned} \mathbb{P}(\text{closed circuit}) &\leq \sum_{n=2}^{\infty} (1-p)^{2n} \sigma(n) \\ &= \frac{9(1-p)^4}{[1-9(1-p)^2]^2}. \end{aligned}$$

One can verify that when  $p > 1 - 1/(2\sqrt{3}) \approx 0.71$ , the above sum converges to a number smaller than one. As a consequence, the origin belongs to an infinite cluster with positive probability.

Note that since the existence of an infinite cluster does not depend on the state of a finite number of edges, we can use Kolmogorov's zero-one law to conclude that the probability that such a cluster exists is either zero or one (see e.g., [47]). If it was zero, then the origin would belong to an infinite cluster also with probability zero. Therefore, whenever  $\theta(p) > 0$ , then an infinite cluster exists with probability one.

### C. Continuum percolation: The random geometric graph

The basic random geometric graph or disk graph  $G_{\lambda,r}$ , as defined in Section II-B2 was first introduced by Gilbert [48]. It relies on two assumptions: First, the nodes' location follows a two-dimensional Poisson point process. Second, each node can communicate directly to any other node within a radius  $r$  around him. The latter assumption comes from the following model: assume that nodes emit with a certain power  $P$ , and that this signal is attenuated over distance according to a deterministic decreasing function  $\ell(d)$ . Assume also that receivers can successfully receive data if the signal is at least  $\beta$  times stronger than the ambient noise, which has power  $W$ . Then the transmission radius is defined by

$$r \triangleq \max\{d : \frac{P\ell(d)}{W} \geq \beta\}. \quad (12)$$

Similarly to in the discrete model, we denote by  $\theta(\lambda, r)$  the probability that a node located at the origin belongs to an infinite cluster. Due to its simplicity, the graph  $G_{\lambda,r}$  can be rescaled while keeping its connectivity properties. Indeed, if all distances are divided by  $\gamma$ , the underlying PPP is transformed into another Poisson process with intensity  $\gamma^2\lambda$ . Thus, the graph  $G_{\gamma^2\lambda, r/\gamma}$  has the same connectivity properties as  $G_{\lambda,r}$  and we have

$$\theta(\gamma^2\lambda, r/\gamma) = \theta(\lambda, r).$$

As in the bond percolation model, we briefly explain a way to show that a phase transition occurs in  $G_{\lambda,r}$ .

1) *Absence of an infinite cluster for small values of  $\lambda$* : Consider a node  $o$  placed at the origin. We populate the set  $C$  of the nodes connected to  $o$  step by step: at step zero, we set  $C = \{o\}$ . Then at each step, we add to  $C$  all nodes that share an edge with an element of  $C$ . As each node has in average of  $\lambda\pi r^2$  edges, this process can be compared to a Galton-Watson process where each individual gives birth to  $\lambda\pi r^2$  children in average. The difference is that in our process, the number of nodes added at each step might be smaller, as some nodes sharing edges with elements of  $C$  might be already in  $C$ . It is known that if the average number of children per individual in a Galton-Watson process is smaller than one, the process stops after a finite number of steps. As our process grows more slowly, it certainly stops in this case too. Therefore we have that if  $\lambda < 1/(\pi r^2)$ , the cluster of the origin is finite a.s.

2) *Existence of a giant cluster for large  $\lambda$* : We use a mapping onto a bond percolation model: We divide the plane into squares of size  $c = r/2\sqrt{2}$  as shown in Figure 2. Each square corresponds to a potential edge of the lattice, which is added if at least one point of the Poisson process falls into this square. Thus, each edge is present with probability  $p = 1 - \exp(-\lambda c^2)$ , independently of the other edges. As a consequence, if  $\lambda \geq \log 2/c^2$ , the edge percolation model contains an infinite cluster a.s.

Moreover, if two edges are adjacent, then by construction two points of the Poisson process are located in squares that share at least at one corner. Therefore, the distance between them is less than  $2\sqrt{2}c = r$ , and they are connected in  $G_{\lambda,r}$ . Accordingly, an infinite collection of connected edges corresponds to an infinite set of connected points in  $G_{\lambda,r}$ .

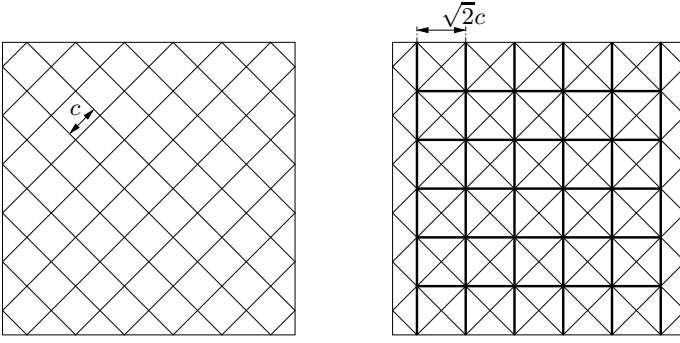


Fig. 2. On the left hand side, the division of the plane into squares. On the right hand side, each square is assigned to an edge of a bond percolation model (bold lines).

We can thus conclude that if  $\lambda \geq \log 2/c^2$ ,  $G_{\lambda,r}$  contains an infinite cluster a.s.

The exact value of the critical density  $\lambda_c(r)$  or critical radius  $r_c(\lambda)$  is unknown. For  $\lambda = 1$ , the bounds  $1.1979 < r_c < 1.1988$  were established with 99.99% confidence in [49].

3) *Generalization to the Boolean model:* Gilbert's random geometric graph is a particular case of the Boolean model (see Section II-B). Let us consider a Boolean model of arbitrary dimension  $d$  where grains are balls whose radius is now random. It turns out that for a suitable radius distribution, a phase transition is observed at some critical germ density. Denoting by  $R$  the (random) radius of a ball, one can show [31] that whenever the dimension of the model  $d$  is greater than one and  $\mathbb{E}(R^4) < \infty$ , there exists a critical value of  $\lambda$  below which the union of the balls  $\Xi$  has only finite components and above which a giant component forms.

#### D. Other models

In this section, we briefly describe other percolation models that are relevant to communication networks. In all of them, the location of the nodes is modeled by a Poisson point process of density  $\lambda$  over  $\mathbb{R}^2$ . They differ only by the criterion used for adding edges between nodes.

1) *Nearest-neighbors networks:* In this model, each node connects to its  $k$  nearest neighbors. This model is for example suitable for a dense wireless network where nodes use power control algorithm in order to be connected only to their  $k$  first neighbors.

An important property of this model is that the value of  $\lambda$  does not affect the connectivity of the model (it is called *scale-free* model). Therefore, its only relevant parameter is  $k$ . One can show that there exists a critical value of  $k$  for which a giant component forms, and below which only finite clusters are observed. In two dimensions, the critical value is conjectured to be  $k = 3$  [50].

2) *Random connection model:* This model is another generalization of Gilbert's model. For each pair of nodes, we consider the distance  $x$  between them. Then we add an edge between them with probability  $g(x)$ , where  $g$  is a function from  $\mathbb{R}^+$  to  $[0, 1]$  such that  $\int_0^\infty xg(x)dx < \infty$ .

This model takes some randomness of the wireless channel into account: depending on the distance, nodes have different

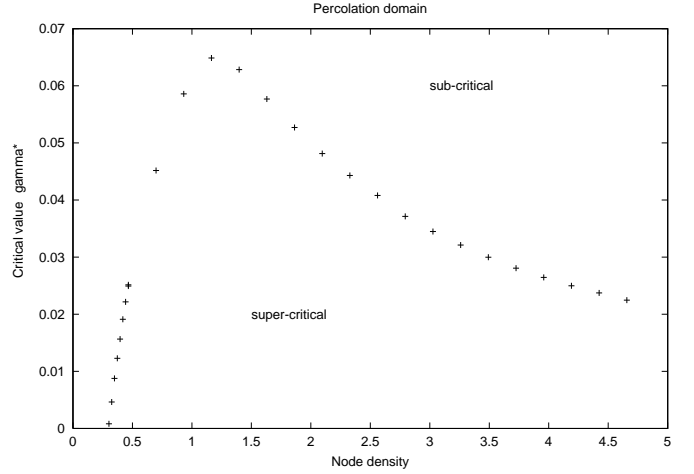


Fig. 3. Evaluation of the function  $\gamma^*(\lambda)$  by simulation.

probabilities to connect successfully. The original model can be obtained by setting  $g(x) = u(r - x)$ . A similar phase transition as in the Boolean model can be observed at some critical density of nodes  $\lambda$  [51].

3) *Signal-to-interference ratio graph (STIRG) model:* The connectivity criterion in (12) compares the received signal to the ambient noise only. However, if several nodes are using the same channel, interferences degrade the received signals. In the so-called STIRG model [52], the SNR threshold is replaced by an SINR threshold as in (9) so that the nodes  $x_i, x_j \in \Phi$  are connected by an edge if

$$\frac{P\ell(\|x_i - x_j\|)}{W + \gamma (\max\{I(x_i); I(x_j)\} - P\ell(\|x_i - x_j\|))} \geq T,$$

where  $I(x_i) = \sum_{x_k \in \Phi \setminus \{x_i\}} P\ell(\|x_i - x_k\|)$ . This condition ensures that the two nodes have sufficient SINR for exchanging data in both directions despite the interference of all the other nodes. The factor  $\gamma \leq 1$  serves as a weight for the interference term and models the gain of the spread spectrum scheme (if any).

This model differs from the others by the fact that if has more degrees of freedom. Clearly, when  $\gamma = 0$ , the model is equivalent to Gilbert's model and it percolates above a certain critical node density  $\lambda^*$ . It has been shown in [52] in the bounded attenuation case and in [53] in the general case that whenever  $\lambda > \lambda^*$ , there exists  $\gamma^*(\lambda) > 0$  such that for any  $\gamma < \gamma^*(\lambda)$  the model still percolates. In other words, whenever the node density is super-critical, the model can tolerate a certain amount of interference before the giant component disappears. Figure 3 illustrates the parameter domain where percolation occurs for bounded attenuation functions  $\ell$ .

#### E. Connectivity in finite networks

In finite networks, there is of course no infinite cluster, and therefore no percolation *stricto sensu*. However, if one considers a sufficiently large network, one expects to observe a similar phenomenon: if the density of nodes is large enough, a component that contains a large fraction of the nodes

should emerge. The following theorem follows from [54] and confirms this intuition in the case of Gilbert's disk graph.

**Theorem 2** *Consider the restriction of a Boolean model to a square of size  $\sqrt{n} \times \sqrt{n}$ , whose connectivity graph is denoted by  $G_{\lambda,r}(n)$ . Denote by  $C_{\lambda,r}(\eta, n)$  the event that there exists in  $G_{\lambda,r}(n)$  a component that contains at least  $\eta n$  vertices. Then we have*

$$\lim_{n \rightarrow \infty} \mathbb{P}(C_{\lambda,r}(\eta, n)) = \begin{cases} 1 & \text{if } \eta < \theta(\lambda, r) \\ 0 & \text{if } \eta > \theta(\lambda, r) \end{cases}$$

As a consequence of the above theorem, since  $\theta(\lambda, r)$  is never equal to one, there is always a non-vanishing fraction of disconnected nodes in the network. However, if one lets the connectivity range  $r$  increase with  $n$ , the fraction of connected nodes can be made to converge to one. If the connectivity range of the nodes is a function  $r(n)$  of the number of nodes, the condition for *asymptotic connectivity* (i.e. the condition under which the probability that all nodes are connected tends to one when the  $n$  increases) is given by

$$r(n) = \sqrt{\frac{\log n}{\pi}} + c(n),$$

where  $c(n)$  is any function such that  $\lim_{n \rightarrow \infty} c(n) = \infty$ . This result can be deduced from [54] and has been published in its explicit form in [55].

*Nearest-neighbor model:* A similar result on asymptotic connectivity has been derived for the nearest-neighbors model. The rate at which the number of neighbors  $k$  must increase with  $n$  is [56]:

$$0.3043 \log n \leq k(n) \leq 0.5139 \log n.$$

In summary, tools from percolation theory and random geometric graphs have enabled analytical studies of the connectivity properties of large ad hoc networks. While connectivity is a fundamental prerequisite for network operation, it does not guarantee any network throughput or capacity. The study of the capacity of wireless networks is the topic of the next section.

## V. CAPACITY AND SCALING LAWS

The capacity of a communication system is the maximum data-rate in bits per second that can be reliably transferred from transmitter to receiver. In the strict information-theoretic sense, this is an unsurpassable upper bound that, in practice, only be approached. In a single Tx-Rx link of unit bandwidth subject to AWGN, the capacity in bits per channel use (i.e. bps/Hz) is given by the Shannon-Hartley formula:

$$\log_2 \left( 1 + \frac{S}{W} \right), \quad (13)$$

where, as before,  $S = P\ell(r)$  and  $W$  are the received power and Gaussian thermal noise at the receiver, respectively.

The situation becomes more complex in an ad hoc network with  $n$  Tx-Rx pairs, where the capacity is much more difficult to define and compute. The most general (and natural) description is given by the so called *capacity region*, which is an  $n \times n$  matrix  $C$  where the  $c_{ij}$  entry corresponds to the capacity from

node  $i$  to node  $j$ , which is also dependent on the signals being generated by the remaining  $n - 1$  transmitting nodes in the network. These can either interfere with the communication between  $i$  and  $j$ , or be cooperative and aid communication between  $i$  and  $j$ . Clearly, due to the many possible ways of interaction, the capacity region of an ad hoc network is difficult to characterize. Even for very small values of  $n$ , such as  $n = 3$ , the capacity region cannot be fully determined. Therefore, intermediate descriptive theories that fall short of the strict information-theoretic standard are needed, as pointed out in more detail in [57].

### A. Capacity scaling laws

One attempt to simplify the problem came in 2000 by Gupta and Kumar [58]. Their approach was to introduce two main simplifications: on the one hand, they proposed to study the case in which all the nodes in the network are required to transmit at the same bit-rate. This implies that the whole capacity region reduces to a single scalar quantity. On the other hand, they proposed to compute only the *scaling limit*, i.e. the order of growth of such scalar quantity as the number of nodes in the network increases. In addition, Gupta and Kumar's scaling law was also derived under some assumptions on the physics of propagation (i.e., channel gains that decay as a power law of the distance between transmitters and receivers), and on some restrictions on the cooperation strategy employed by the nodes (i.e., multi-hop operation and pairwise coding and decoding at each hop). Their main result was the so called square-root law, namely, as  $n$  increases the per-node bit-rate decreases as  $1/\sqrt{n}$ .

Due to their restrictive model, the result of Gupta and Kumar cannot be considered an unsurpassable bound in the strict information-theoretic sense. It does not allow sophisticated network coding strategies but only point-to-point transmission across multiple hops, and it relies on a specific physical propagation model in which a signal received at distance  $\|x\|$  from the transmitter is given by  $\ell(x) = \|x\|^{-\alpha}$ . Under this model, at each hop the collective interference amplitude can be approximated as Gaussian and added to the noise term  $W$  in (13). In this way, any point-to-point link in the network from an arbitrary chosen origin to point  $x \in \mathbb{R}^2$  can support a rate of

$$\log_2 \left( 1 + \frac{Ph_x \ell(\|x\|)}{W + I(x)} \right).$$

Since there is no a priori reason to operate the network in a multi-hop fashion and treat the interference term  $I(x)$  as pure noise, the square root law of Gupta and Kumar can in principle be surpassed. One can, for example, envisage a network strategy in which groups of nodes help each other, rather than interfere, by coherently summing their signals at the receiver.

Perhaps the main contribution of Gupta and Kumar has been to show that such a simple geometric interference-based model can lead to meaningful insights on the capacity limitations of wireless networks operated with current multi-hop technologies. Furthermore, their paper showed that stochastic geometry tools such as random Voronoi tessellations

and random geometric graphs can be used to analyze the performance of network operation protocols.

Gupta and Kumar’s work sparked an enormous interest in the field. On one side, under the same restrictive model, simpler strategies achieving the same square root law have been proposed [59], [60]. The work in [60] is particularly relevant in the context of this paper, as it showed a connection between protocol design and percolation theory. In that paper, the flow of information through the network is compared to the number of disjoint paths crossing the network from side to side in an underlying percolation model. It is shown that in a network of area proportional to the number of nodes  $n$ , the number of disjoint paths crossing the network area from side to side in the underlying percolation model grows with  $\sqrt{n}$ . Hence, roughly speaking, the amount of information that can flow across the network is only of the order of  $\sqrt{n}$ , and since  $n$  nodes must share this flow, the  $1/\sqrt{n}$  bound follows.

On the other side, researchers were interested in discovering whether the square root law could hold in a more general context. Hence, they started to seek bounds on the capacity scaling that were independent on the network operation strategy. This more general approach led to considerable success. Starting with the work of Xie and Kumar [61], *information-theoretic* scaling laws, independent of any strategy used for communication, have been established by many authors [62]–[67]. These arise from the application of the information-theoretic cut-set bound [68, Ch. 15] which allows to bound the total information flow across any network cut, allowing arbitrary cooperation among the nodes. Among these works, a short information-theoretic derivation of the square root law relying on geometric elements of spatial point processes is given in [64]. It is important to notice, that while essentially confirming the square root law in a more general context, all the results above still depend on the assumptions made on the electromagnetic propagation process.

Indeed, more striking results appear in [69], and [70]. These papers show that a much higher per-node bit-rate than  $\Theta(1/\sqrt{n})$  can be achieved in wireless networks by changing the assumptions on the physical propagation process. These authors introduce the presence of an additional source of randomness by adding fading. Under some stochastic assumptions on the fading process and when the path loss exponent  $\alpha$  is sufficiently small, these authors describe node cooperation strategies based on space-time codes which can achieve an almost constant per-node bit rate: a great improvement compared to Gupta and Kumar’s original bound! Hence, the main message of the above papers is that there is a gain to be expected when adopting more complex node cooperation strategies than simple multi-hop operation.

A recent additional effort has been made in [71], which recognizes that the strong dependence of information-theoretic results on heuristic physical propagation models is somehow undesirable for a theory that seeks the fundamental limits of communication. They showed that the square root law also arises from physical limitations dictated by Maxwell’s physics of wave propagation, in conjunction to the information-theoretic cut-set bound. This result shows that the original prediction of Gupta and Kumar is also due to a degrees-

of-freedom limitation that is independent of empirical path-loss models and stochastic fading models. In other words, stochastic fading assumptions such as in [69], and [70] are open to debate, as they can lead to non-physical results.

But does this lead to the conclusion that the sophisticated cooperative strategies described in [69] and [70] do not lead to any improvement over multi-hop operation? The general answer is no. Recall that scaling results are only up to order and pre-constants can make a huge difference in practice. Sophisticated cooperative communication schemes could be extremely beneficial in networks of any fixed size and improve upon multi-hop operation. The precise characterization of this improvement, however, remains unknown while it is only known that this improvement vanishes as  $n$  grows.

### B. Transmission capacity and area spectral efficiency

Although scaling laws have provided significant insight on the large-scale performance of ad hoc networks, a finer view of throughput limits is needed for understanding how different technologies and protocols affect the baseline performance of distributed wireless networks. It is the need to move beyond scaling laws that allows stochastic geometry, and in particular the techniques for characterizing interference and outage of Section III, to shine. Many, even most, communication design choices will have a significant effect on the achievable SINR and hence rate, while not affecting the scaling law. In this section, we see how stochastic geometry can be used to determine the transmission capacity (the area spectral efficiency subject to an outage constraint), in a specific ad hoc network design.

The transmission capacity, first proposed in [72], is the maximum number of bits per second sent by all users in the network per unit area, subject to a constraint on outage probability relative to a SINR threshold. Formally, the transmission capacity  $c(\lambda) = \lambda_\epsilon(1 - \epsilon)$  transmissions/area, where  $\lambda_\epsilon$  is the maximum density of transmissions supported such that  $\mathbb{P}[\text{SINR} < T] \leq \epsilon$ , for an SINR target  $T$ . Adding the per-user data rate (which would be about  $\log_2(1 + T)$  bps/Hz) would give the area spectral efficiency.

There are some shortcomings of this metric, namely that as defined it is inherently single-hop (non end-to-end), presumes a common SINR target and outage probability (conceptually like the packet error rate), and is more the description of a given technology (through its achieved SINR) than of technology-independent fundamental limits. Nevertheless, it does capture key aspects of capacity – “good” communication techniques should allow a higher transmission capacity – and combined with a homogeneous Poisson distribution for the interfering nodes, yields superior analytical tractability to other network throughput metrics. We now provide the simplest baseline model for transmission capacity. The key aspects of the model are as follows, with generalizations noted.

- Fixed transmit distance  $r$ . Variable transmit distances cause a fixed loss factor of  $\mathbb{E}[R^2]/(\mathbb{E}[R])^2$  if the transmit distance  $R$  is a random variable [73].
- Single transmit and receive antennas. Multiple antennas can obviously increase the transmission capacity [43], [74].

- Homogeneous PPP for interferers, which implies an ALOHA-type transmission scheme. Generalizations are nontrivial, but one to clustered PPP's has been undertaken [75], and exclusion regions are considered in [76].
- Interference is treated as noise, although it can in principle be cancelled or suppressed by an appropriate receiver to get higher capacity [77], [78].

The key to transmission capacity is outage probability, which for the case of Rayleigh fading can be exactly derived as in (10). Setting this equal to the outage probability target  $\epsilon$  and inverting, the transmission capacity in the simple case is (two-dimensional networks, thermal noise neglected)

$$c_o(\epsilon) = \frac{(1-\epsilon)\ln(1-\epsilon)}{C(\alpha)r^2T^{2/\alpha}} = \frac{\epsilon}{C(\alpha)r^2T^{2/\alpha}} + \Theta(\epsilon^2), \quad (14)$$

where  $C(\alpha) = \pi^{1+2/\alpha}/\sin(2\pi/\alpha)$ . This simple expression shows precisely how the number of supportable users in the network depends on outage probability (about linearly, for low outage), path loss exponent  $\alpha$ , and target SIR  $T$  (noise can be included at the expense of more bulky expressions).

If there is no fading – just large-scale path loss – it is possible to get tight bounds but not an exact solution. In this case, bounds on the transmission capacity are as follows, where we have included the noise power  $\eta$  and transmit power  $\rho$  for  $\text{SNR} = \rho/\eta$

$$\begin{aligned} \frac{(\alpha-1)\epsilon}{\alpha\pi} \left( \frac{1}{r^2T^{2/\alpha}} + \text{SNR}^{2/\alpha} \right) + \Theta(\epsilon^2) &\leq c_o(\epsilon) \\ &\leq \frac{\epsilon}{\pi} \left( \frac{1}{r^2T^{2/\alpha}} + \text{SNR}^{-2/\alpha} \right) + \Theta(\epsilon^2). \end{aligned} \quad (15)$$

Note the similarity between (14) and (15): they are within a small constant of each other, all the parameters are of the exact same order. Arbitrary fading distributions can be accommodated at further loss of tractability [73], but again there is no change in the first-order effects of the system parameters.

What is useful about the transmission capacity is that it allows candidate technologies and design choices to be compared objectively, analytically, and fairly simply. For example, one might ask how adding spread spectrum modulation (CDMA) to the system would change the number of supportable users. The answer with the transmission capacity metric is fairly immediate. With asynchronous binary direct-sequence spread spectrum (DSSS), the target SINR is effectively decreased to  $2T/3M$  at the cost of a bandwidth penalty of  $M^1$ . If frequency-hopping (FH) was used instead,  $M$  independent channels are created with an effective interference density of  $\lambda/M$  on each of them. With some straightforward manipulations it can be seen that therefore the transmission capacities become

$$c^{\text{DS}}(\epsilon) = \left( \frac{3M}{2} \right)^{\frac{2}{\alpha}} c_o(\epsilon), \quad c^{\text{FH}}(\epsilon) = M c_o(\epsilon). \quad (16)$$

<sup>1</sup>Asynchronous binary sequences of  $M \pm 1$  bits have a cross-correlation variance of  $\frac{2}{3M}$ , perfectly synchronized sequences have  $\frac{1}{M}$  which is actually not as desirable.

The ratio

$$\frac{c^{\text{FH}}}{c^{\text{DS}}} = k_1 M^{1-\frac{2}{\alpha}} \quad (17)$$

strongly implies that frequency-hopping is a superior form of spread spectrum in an ad hoc network, for example by a factor of  $\sqrt{M}$  when  $\alpha = 4$ . In principle, any modulation technique, multiple access or even scheduling protocol can be analyzed using the transmission capacity metric to predict relative gains.

### C. The road forward

Scaling laws on transport capacity and exact results on transmission capacity both provide important views into the network capabilities, but both presently fall short of providing a complete metric for achievable network throughput. Future research should attempt to bridge this gap, by utilizing stochastic geometry to quantify end-to-end achievable rates, which is what the transport capacity effectively is. **Include references to multihop transmission capacity papers.** For example, each hop in the network can be considered to have some outage probability (based on the number of active transmitters and other parameters), and an aggregation of such stochastic links comprises an end-to-end connection in the network, with some aggregate outage probability and achievable data rate.

Another promising related approach is the increasing popularity of erasure channels and erasure networks to model the performance of links that are occasionally in outage [79]. Although this has never been done, one can envision combining emerging results on the capacity of wireless erasure networks with outage (erasure) probabilities computed with the help of stochastic geometry tools. Two important new techniques from information theory for characterizing interference in wireless networks include the deterministic capacity [80] and the degrees-of-freedom region [81]. These approaches both require relative values for the channel gains of each link, which again may require stochastic geometry to characterize in a statistical sense for a typical node placement. In short, stochastic geometry can be viewed as a supplement and tool for many approaches to determining network capacity.

When discussing the capacity in its information-theoretic sense, that is as an upper bound to the best possible network throughput, it is important to note that the capacity is not likely to be achieved by a purely random placement of nodes (in particular, random transmitters). Rather, capacity-approaching techniques will almost surely require some degree of cooperation or at least coordination among the contending transmitters, which will degrade the relevance of the 2-D Poisson distribution upon which most results in this tutorial are based. As again highlighted in the conclusions, particularly from the standpoint of understanding network capacity, new stochastic geometric tools that go beyond a homogeneous PPP are urgently needed to better characterize networks with cognition and intelligent transmission scheduling.

## VI. OTHER APPLICATIONS: ROUTING, INFORMATION PROPAGATION, POINT PROCESSES WITH FADING, AND SECURITY

While the connectivity and capacity have been the main applications of stochastic geometry and random geometric

graphs to ad hoc networks, there have recently been other problems areas where these techniques have led to interesting results. Some of them are briefly discussed in this section.

### A. Routing

While many of the analytical results discussed so far focus on single-hop metrics (outage, single-hop throughput and progress), recently progress has been made toward analyzing routing protocols on a PPP using stochastic geometry tools to evaluate the mean cost of the route and its fluctuations [82]. A typical example is that of greedy forward routing where a transmitter sends a packet to the nearest node which is closer to the packet's destination than the transmitter. In the Poisson case, the geometry of the associated routes can be analyzed thanks to the locality of the definition of the next hop [82]. Another approach is taken in [83] where nearest-neighbor routing in a sector pointed at the destination is compared with routing schemes that use longer hops. In these papers, interference is not taken into account to determine the feasibility of a link. A first attempt to combine routing with an SINR-based link model can be found in [84].

### B. Epidemic models; first-passage percolation

Random geometric graphs are useful to model the propagation of information (or disease, fire, or anything else) in a network of randomly placed nodes. In this section, we briefly cover some broadcasting strategies and elements of first-passage percolation.

In this section, we will denote by  $G_{\lambda,r}^*$  the graph obtained by adding a node at the origin in the standard random geometric graph  $G_{\lambda,r}$ . As explained in Section II-A1, adding this point is equivalent to conditioning  $G_{\lambda,r}$  on the presence of a node at the origin.

1) *Broadcasting in multi-hop networks*: Consider the scenario where a message is to be broadcast in a static network whose connectivity is represented by the graph  $G_{\lambda,r}^*$ . Let us assume that the MAC layer prevents collisions perfectly, and that each nodes forwards the message when it receives it for the first time (flooding). Under this algorithm, the message propagates to the entire component to which the source belongs. Therefore, the probability that the message reaches an infinite number of nodes is equal to the probability that the source belongs to an infinite cluster  $\theta(\lambda, r)$ .

a) *Probabilistic broadcast (gossiping)*: The number of transmission occurring in the above algorithm is exactly equal to the number of nodes who received the message. This number is unnecessarily large, since each transmission reaches all the neighbors of the sender. Thus, each node receives the message from each neighbor while once would be enough. A strategy to reduce the number of transmission is to let the nodes forward the message only with a probability  $p < 1$ .

The decision whether to forward or not can be made by the nodes before the broadcast starts. Thus, in order to analyze the propagation of the message, one can thin the point process and retain only the nodes who are willing to forward the message (called hereafter *active* nodes). We obtain a thinned PPP of intensity  $p\lambda$  on which we can construct restricted graph

$G_{p\lambda,r}$ . Thus the message originating at the origin reaches an infinite number of nodes if the origin is active and belongs to an infinite cluster of the thinned graph. This happens with probability  $\theta_p(\lambda, r) := p\theta(p\lambda, r)$ , as the two conditions are independent. As a consequence, if the original graph  $G_{\lambda,r}$  is super-critical, there is a critical value for  $p$  above which the probability  $\theta_p(\lambda, r)$  of a *successful* broadcast (*i.e.*, a broadcast where an infinite number of nodes are reached) is strictly positive.

The next value of interest is the fraction of nodes reached by the message in case of a successful broadcast. Nodes reached by the message include the active nodes that belong to the infinite cluster in  $G_{p\lambda,r}$  and the inactive nodes that are within distance  $r$  from them. The fraction of nodes belonging to the latter category can be computed as follows: Consider a location  $x$  of  $\mathbb{R}^2$ . If an active node were located at  $x$ , it would belong to the infinite cluster of  $G_{p\lambda,r}$  with probability  $\theta(p\lambda, r)$ . This means that the point  $x$  is within a distance less than  $r$  from a node of the infinite cluster with that probability. Thus, the total fraction of nodes reached by the message is precisely  $\theta(p\lambda, r)$ , which is a surprisingly simple result.

b) *Other models*: Probabilistic broadcasting has been studied in [85], and an extension to a model with collisions can be found in [86].

Another variation of the gossiping algorithm, where nodes forward the message only if their node degree is less than a certain threshold, can be addressed using the STIRG model presented in §IV-D3 by using the step function  $\ell(x) = 1 - u(x - r)$  as an attenuation function. A sophisticated algorithm to realize degree-dependent activation in a sensor network can be found in [87], where the authors show the existence of a phase transition for the propagation of messages under their algorithm.

2) *First-passage percolation*: First-passage percolation is a branch of percolation theory that addresses the actual length of the shortest path in percolation models (see *e.g.*, [88] for an introduction). It is useful to compute the propagation speed of messages in a multi-hop network.

a) *Asymptotic shape*: Consider the graph  $G_{\lambda,r}^*$ , and define the *hop distance* (also called *chemical distance*) between two nodes as the number of hops on the shortest path between them (or infinity if no such path exists). Let  $S_k$  be the set of nodes that are at distance  $k$  from the origin. We expect that the shape of  $S_k$  is relatively circular around the origin. The following theorem confirms this intuition:

**Theorem 3 (see, *e.g.*, [89])** *There is a  $\mu > 0$  such that for any  $0 < \varepsilon < 1$  almost surely*

$$S_k \subset B(o; (1 + \varepsilon)k\mu) \setminus B(o; (1 - \varepsilon)k\mu)$$

*for all sufficiently large  $k$ .*

b) *Blinking model*: First-passage percolation can also be used to assess the speed of propagation of a message in a dynamic model. An example is given in [90], where nodes alternate between active and sleep mode in a random and independent fashion: At any instant, only a fraction  $f < 1$  of the nodes are active, so that the connectivity graph is  $G_{f\lambda,r}$ .

As the message is emitted by the source, it instantaneously propagates to all active nodes that are connected to the source. If  $f\lambda$  is below the critical density, the initial propagation is a.s. limited to a finite number of nodes. Then, the propagation continues as further nodes switch to active mode. First-passage percolation allows to show that in this case, the asymptotic shape of the area where the message has propagated after a time  $t$  is still circular for large  $t$  despite the sub-criticality of the graph at each instant. **Include reference to Ganti paper if accepted.**

### C. Point processes with fading

The path loss over a wireless link is well modeled by the product of a distance component (often called large-scale path loss) and a fading component (called small-scale fading or shadowing). It is usually assumed that the distance part is deterministic while the fading part is modeled as a random process. This distinction, however, does not apply to many types of wireless networks, where the distance itself is subject to uncertainty. In this case it may be beneficial to consider the distance and fading uncertainty jointly, *i.e.*, to define a PP that incorporates both.

We introduce a framework that offers such a geometrical interpretation of fading and some new insight into its effect on the network.

Let  $\{Y_i\}$ ,  $i \in \mathbb{N}$ , be a stationary Poisson point process in  $\mathbb{R}^d$  of intensity 1, and define the *path loss point process* (before fading) as  $\Phi = \{X_i \triangleq \|Y_i\|^\alpha\}$  for a path loss exponent  $\alpha$ . Let  $\{h, h_1, h_2, \dots\}$  be an iid stochastic process with  $h$  drawn from a distribution  $F \triangleq F_h$  with unit mean and let  $\Xi = \{\xi_i \triangleq X_i/h_i\}$  be the *path loss process with fading*.

Assume that there is a transmitter at the origin, and all other nodes are receivers. So there is no interference, and the network is purely noise-limited. Nodes can receive the transmission if their path loss  $\xi_i$  is smaller than  $1/s$ . These nodes are said to be connected to the origin. The processes of connected points are denoted by  $\hat{\Phi}$  and  $\hat{\Xi}$ , respectively. So

$$\hat{\Phi} = \{X_i \in \Phi : \xi_i < 1/s\}; \quad \hat{\Xi} = \Xi \cap [0, 1/s).$$

Fig.4 shows a PPP of intensity 1 in a  $16 \times 16$  square, with the nodes marked that can be reached from the center, assuming a path gain threshold of  $s = 0.1$ . The disk shows the maximum transmission distance in the non-fading case.

Since  $\Phi$  and  $\Xi$  are constructed from a uniform PPP using mapping and independent random scaling (fading), the processes  $\Phi$ ,  $\hat{\Phi}$ ,  $\Xi$ , and  $\hat{\Xi}$  are Poisson. We would like to find the number of connected nodes and their expected sum-distance  $\mathbb{E}(\sum_{X \in \hat{\Phi}} X^{1/\alpha})$  which may also be also termed the *broadcast transport sum-distance*.

1) *Connectivity*: Using the Nakagami- $m$  fading model, we have [91]

- $\hat{\Phi}$  is Poisson with  $\hat{\lambda}(x) = \lambda(x)(1 - F(sx))$  (independent thinning).
- With Nakagami- $m$  fading, the number  $\hat{N} = \hat{\Phi}(\mathbb{R}^+)$  of connected nodes is Poisson with mean

$$\mathbb{E}\hat{N}_m = \frac{c_d}{(ms)^\delta} \frac{\Gamma(\delta + m)}{\Gamma(m)}, \quad (18)$$

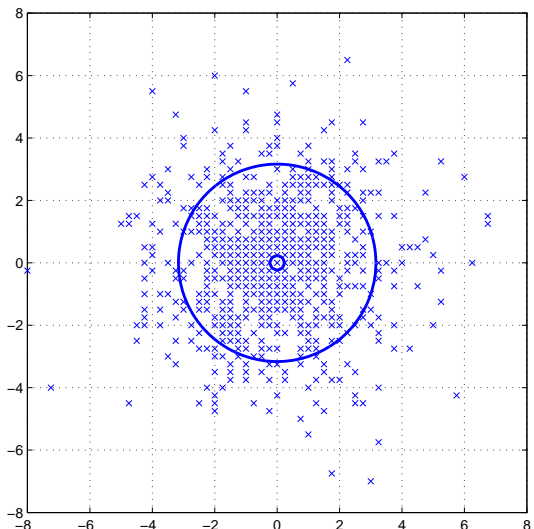


Fig. 4. A Poisson point process of intensity 1 in a  $16 \times 16$  square. The reachable nodes by the center node are indicated by a bold  $\times$  for a path gain threshold of  $s = 0.1$ , a path loss exponent of  $\alpha = 2$ , and Rayleigh fading (standard network). The circle indicates the range of successful transmission in the non-fading case. Its radius is  $1/\sqrt{s} \approx 3.16$ , and there are about  $\pi/s \approx 31$  nodes inside.

where  $\delta = d/\alpha$  as before, and the *connectivity fading gain*, defined as the ratio of the expected numbers of connected nodes with and without fading, is

$$\frac{\mathbb{E}\hat{N}_m}{\mathbb{E}\hat{N}_\infty} = \frac{1}{m^\delta} \frac{\Gamma(\delta + m)}{\Gamma(m)} = \mathbb{E}(h^\delta). \quad (19)$$

2) *Broadcast transport sum-distance and capacity*: The *broadcast transport sum-distance*  $D$ , *i.e.*, the expected sum over all the distances  $X_i^{1/\alpha}$  from the origin is defined as

$$D_m \triangleq \mathbb{E} \left( \sum_{X \in \hat{\Phi}} X^{1/\alpha} \right). \quad (20)$$

Using Campbell's theorem (5), it can be shown that the broadcast transport sum-distance for Nakagami- $m$  fading is

$$D_m = c_d \frac{\delta}{\Delta} \frac{1}{(ms)^\Delta} \frac{\Gamma(m + \Delta)}{\Gamma(m)}, \quad (21)$$

where  $\Delta = (d+1)/\alpha$  and the (broadcast) *fading gain*  $D_m/D_\infty$  is

$$\frac{D_m}{D_\infty} = \frac{1}{m^\Delta} \frac{\Gamma(m + \Delta)}{\Gamma(m)} = \mathbb{E}(h^\Delta). \quad (22)$$

So the fading gain  $D_m/D_\infty$  is the  $\Delta$ -th moment of  $h$ .

To obtain the (broadcast) transport capacity, we may multiply  $D$  by the rate of transmission  $R$ . Assuming at-capacity signaling,  $R = \log_2(1 + s)$ . When maximizing the product  $DR$  over  $R$  (or  $s$ ), we find that an optimum rate only exists if  $\Delta \leq 1$ . If  $\Delta > 1$  (or  $\alpha < d + 1$ ),  $DR$  can be made arbitrarily large by letting the rate go to zero — irrespective of the transmit power! This follows from  $R(s) = \Theta(s)$  and  $D(s) = \Theta(s^{-\Delta})$  as  $s \rightarrow 0$ . So  $DR = \Theta(s^{1-\Delta})$  which diverges if  $\Delta > 1$ .

#### D. Secrecy

There has been growing interest in information-theoretic secrecy. To study the impact of the secrecy constraint on the connectivity of ad hoc networks, we introduce a new type of random geometric graph, the so-called *secrecy graph*, that represents the network or communication graph including only links over which secure communication is possible. We assume that a transmitter can choose the rate very close to the capacity of the channel to the intended receiver, so that any eavesdropper further away than the receiver cannot intercept the message. This translates into a simple geometric constraint for secrecy which is reflected in the secrecy graph. In this initial investigation, we study some of the properties of the secrecy graph.

Let  $\hat{G}_r = (\Phi, \hat{E})$  be a disk graph in  $\mathbb{R}^d$  (see §IV-C), where  $\Phi = \{X_i\} \subset \mathbb{R}^d$  is a PPP of intensity 1 representing the locations of the nodes, also referred to as the “good guys”. We can think of this graph as the unconstrained network graph that includes all possible edges over the good guys could communicate if there were no secrecy constraints.

Take another PPP  $\Psi = \{Y_i\} \subset \mathbb{R}^d$  of intensity  $\lambda$  representing the locations of the eavesdroppers or “bad guys”. These are assumed to be known to the good guys.

Based on  $\hat{G}$ , we define the following secrecy graphs (SGs):

*The directed secrecy graph:*  $\vec{G} = (\phi, \vec{E})$ . Replace all edges in  $\hat{E}$  by two directional edges. Then remove all edges  $\overrightarrow{X_i X_j}$  for which  $\Psi(B(X_i; \|X_i - X_j\|)) > 0$ , i.e., there is at least one eavesdropper in the ball.

From this directed graph, two undirected graphs are derived:

*The basic secrecy graph:*  $G_{\lambda,r} = (\Phi, E)$ , where the (undirected) edge set  $E$  is

$$E \triangleq \{X_i X_j : \overrightarrow{X_i X_j} \in \vec{E} \text{ and } \overrightarrow{X_j X_i} \in \vec{E}\}.$$

*The enhanced secrecy graph:*  $G'_{\lambda,r} = (\phi, E')$ , where

$$E' \triangleq \{X_i X_j : \overrightarrow{X_i X_j} \in \vec{E} \text{ or } \overrightarrow{X_j X_i} \in \vec{E}\}.$$

With  $\theta(\lambda, r)$  being the probability that the component in  $G_{\lambda,r}$  containing the origin (or any arbitrary fixed node) is infinite, we know from Subsection §IV-C that  $\theta(0, r) > 0$  for  $r > r_c$ , where  $r_c \approx 1.198$  is the critical radius for percolation of the (unrestricted) disk graph. For radii larger than  $r_c$ , we define

$$\lambda_c(r) \triangleq \inf\{\lambda : \theta(\lambda, r) = 0\}, \quad r > r_c, \quad (23)$$

as the critical density for percolation on the secrecy graph.

Some of the properties of these secrecy graphs can be analytically determined, such as the out-degree in directional graph  $\vec{G}_{\lambda,\infty}$  which turns out to be geometric with mean  $1/\lambda$ . This is easily seen if we consider the sequence of nearest neighbors of  $o$  in the combined process  $\Phi \cup \Psi$ .  $N^{\text{out}} = n$  if the closest  $n$  are in  $\Phi$  and the  $(n+1)$ -st is in  $\Psi$ . Since these are independent events,

$$\mathbb{P}[N^{\text{out}} = n] = \frac{\lambda}{1+\lambda} \left( \frac{1}{1+\lambda} \right)^n. \quad (24)$$

The node degree distribution for  $r < \infty$  can also be found analytically; it is a distribution that includes the Poisson and

geometric distributions as special cases. As  $\lambda \rightarrow 0$  it is Poisson (standard disk graph), while for  $r \rightarrow \infty$  it is geometric (this is the case considered above). Further results and bounds on the percolation threshold for the secrecy graph are given in [92]. It turns out that  $\lambda = 0.15$  already makes percolation impossible. Hence a small density of eavesdroppers can have a drastic impact on the connectivity properties of the network.

#### VII. CONCLUDING REMARKS

In this tutorial article we have attempted to show that stochastic geometry and random graph theory are indispensable tools in the analysis of large wireless networks, and allow quantitative analytical results on a number of concrete and important problems in large wireless networks, in particular for ad hoc and sensor networks. In particular, we have shown that these tools can be used to model and quantify interference, connectivity, outage probability, throughput and capacity in wireless networks. There are many other possibly applications of these techniques, a few of which are mentioned in §VI, and many more in the accompanying special issue, including:

- **To be added: list of key topics in the special issue.**

As this list of topics makes plain, stochastic geometry and random graph theory can be applied to a wide range of problems in wireless networks and will prove of great interest in the coming years to researchers working in the fields of networking, wireless communications, and network information theory. Because these techniques have emerged from the fields of applied probability, point processes and queueing theory, but are now being adapted and advanced by mathematically-inclined engineers, it is important that cross-disciplinary dialogues continue, perhaps in part through dedicated journal issues like the present one and workshops like SpaSWiN<sup>2</sup>. We also hope that an increasing number of engineering graduate programs will offer formal classroom training in these methods.

Many important areas for future study remain and are highlighted by the work in this special issue. In order to better model cooperative wireless networks – including techniques as basic as carrier sensing and as sophisticated as interference alignment and network coding – tractable results or approximations that go beyond the stationary Poisson distribution for the node locations are highly desirable but presently lacking. The capacity of wireless networks is one of the most important and general open problems in information theory, and stochastic geometry and random graphs appear destined to play a key role in characterizing it given the primacy of network geometry in determining interference and hence achievable rates. Present attempts at determining achievable end-to-end rates using these tools are still at an early stage.

#### REFERENCES

- [1] D. Stoyan, W. Kendall, and J. Mecke, *Stochastic Geometry and Its Applications*, 2nd Edition, 2nd ed. John Wiley and Sons, 1996.

<sup>2</sup>The IEEE Workshop on Spatial Stochastic models for Wireless Networks, [www.spaswin.org](http://www.spaswin.org), has been held annually in conjunction with WiOpt, the International Symposium on Modeling and Optimization in Mobile, Ad Hoc, and Wireless Networks, since 2005.

- [2] M. Penrose, *Random Geometric Graphs*. Oxford Studies in Probability, Oxford University Press, 2003, ISBN 0 19 850626 0.
- [3] N. Campbell, "The study of discontinuous phenomena," *Mathematical Proceedings of the Cambridge Philosophy Society*, vol. 15, pp. 117–136, 1909.
- [4] W. Schottky, "Über spontane Stromschwankungen in verschiedenen Elektrizitätsleitern," *Annalen der Physik*, vol. 57, pp. 541–567, 1918.
- [5] S. O. Rice, "Mathematical analysis of random noise," *Bell Systems Technical Journal*, vol. 23, pp. 282–332, 1944.
- [6] S. B. Lowen and M. C. Teich, "Power-law shot noise," *IEEE Transactions on Information Theory*, vol. 36, no. 6, pp. 1302–1318, November 1990.
- [7] S. Musa and W. Wasylkiwskyj, "Co-channel interference of spread spectrum systems in a multiple user environment," *IEEE Transactions on Communications*, vol. 26, no. 10, pp. 1405–1413, Oct 1978.
- [8] E. S. Sousa and J. A. Silvester, "Optimum transmission ranges in a direct-sequence spread-spectrum multihop packet radio network," *IEEE Journal on Sel. Areas in Communications*, vol. 8, no. 5, pp. 762–71, Jun. 1990.
- [9] E. S. Sousa, "Interference modeling in a direct-sequence spread-spectrum packet radio network," *IEEE Trans. on Communications*, vol. 38, no. 9, pp. 1475–1482, September 1990.
- [10] —, "Performance of a spread spectrum packet radio network link on a Poisson field of interferers," *IEEE Transactions on Information Theory*, vol. 38, no. 6, pp. 1743–1754, November 1992.
- [11] J. Kingman, *Poisson Processes*. Oxford, England: Oxford University Press, 1993.
- [12] J. Ilow and D. Hatzinakos, "Analytic alpha-stable noise modeling in a Poisson field of interferers or scatterers," *IEEE Trans. on Signal Processing*, vol. 46, no. 6, pp. 1601–1611, June 1998.
- [13] F. Baccelli, M. Klein, M. Lebourges, and S. Zuyev, "Stochastic geometry and architecture of communication networks," *J. Telecommunication Systems*, vol. 7, no. 1, pp. 209–227, 1997.
- [14] F. Baccelli and S. Zuyev, "Poisson-Voronoi spanning trees with applications to the optimization of communication networks," *Operations Research*, vol. 47, no. 4, pp. 619–631, 1999.
- [15] —, "Stochastic geometry models of mobile communication networks," in *Frontiers in Queueing*. Boca Raton, FL: CRC Press, 1997, pp. 227–243.
- [16] S. Zuyev, "Stochastic geometry and telecommunications networks," in *Stochastic Geometry: Highlights, Interactions and New Perspectives*, W. S. Kendall and I. Molchanov, Eds. Oxford University Press, 2009, (to appear).
- [17] C. C. Chan and S. V. Hanly, "Calculating the outage probability in a CDMA network with spatial Poisson traffic," *IEEE Transactions on Vehicular Technology*, vol. 50, no. 1, pp. 183–204, 2001.
- [18] F. Baccelli, B. Błaszczyszyn, and F. Tournois, "Downlink admission/congestion control and maximal load in CDMA networks," in *Proceedings, IEEE INFOCOM*, 2003.
- [19] X. Yang and A. Petropulu, "Co-channel interference modelling and analysis in a Poisson field of interferers in wireless communications," *IEEE Trans. on Signal Processing*, vol. 51, no. 1, pp. 64–76, Jan. 2003.
- [20] F. Baccelli, B. Błaszczyszyn, and M. Karray, "Up and downlink admission/congestion control and maximal load in large homogeneous CDMA networks," *MONET*, vol. 9, no. 6, pp. 605–617, December 2004.
- [21] M. Win, P. Pinto, A. Giorgetti, M. Chiani, and L. Shepp, "Error performance of ultrawideband systems in a poisson field of narrow-band interferers," in *Proc., IEEE Intl. Symposium on Spread Spectrum Techniques and Applications*, Aug. 2006, pp. 410–416.
- [22] C. Yin, L. Gao, and S. Cui, "Scaling laws for overlaid wireless networks: A cognitive radio network vs. a primary network," *Submitted to IEEE Trans. Info. Theory*, 2008, available at <http://arxiv.org/abs/0805.1209>.
- [23] V. Chandrasekhar and J. G. Andrews, "Unlink capacity and interference avoidance for two-tier cellular networks," *IEEE Trans. on Wireless Communications*, to appear, 2008, <http://arxiv.org/abs/cs/0702132v1>.
- [24] O. Dousse, M. Franceschetti, and P. Thiran, "On the throughput scaling of wireless relay networks," *IEEE/ACM Trans. on Networking*, vol. 14, no. 6, pp. 2756 – 2761, Jun. 2006.
- [25] D. Daley and D. V. Jones, *An introduction to the theory of point processes*. New York: Springer, 1988.
- [26] F. Baccelli and P. Bremaud, *Elements of Queueing Theory. Palm Martingale Calculus and Stochastic Recurrences*. Springer, 2003.
- [27] B. Hough, M. Krishnapur, Y. Peres, and B. Virag, "Determinantal processes and independence," *Probability Surveys*, vol. 3, 2006.
- [28] P. Brémaud and L. Massoulié, "Power spectra of general shot noises and hawkes point processes with a random excitation," *Advances in Applied Probability*, vol. 34, no. 1, pp. 205–222, 2002.
- [29] G. Matheron, *Random Sets and Integral Geometry*. London: John Wiley & Sons, 1975.
- [30] F. Baccelli and B. Błaszczyszyn, "On a coverage process ranging from the Boolean model to the Poisson Voronoi tessellation, with applications to wireless communications," *Adv. Appl. Probab.*, vol. 33, pp. 293–323, 2001.
- [31] R. Meester and R. Roy, *Continuum percolation*. Cambridge University Press, 1996.
- [32] G. Grimmett, *Percolation*. Springer, 1999.
- [33] M. J., *Lectures on Random Voronoi Tessellations*, ser. Lecture Notes in Statistics. New York: Springer-Verlag, 94, vol. 87.
- [34] F. Baccelli, M. Klein, M. Lebourges, and S. Zuyev, "Stochastic geometry and architecture of communication networks," *J. Telecommunication Systems*, vol. 7, pp. 209–227, 1997.
- [35] S. B. Lowen and M. C. Teich, "Power-law Shot Noise," *IEEE Transactions on Information Theory*, vol. 36, no. 6, pp. 1302–1318, Nov. 1990.
- [36] J. Ilow and D. Hatzinakos, "Analytical Alpha-stable Noise Modeling in a Poisson Field of Interferers or Scatterers," *IEEE Transactions on Signal Processing*, vol. 46, no. 6, pp. 1601–1611, 1998.
- [37] E. S. Sousa and J. A. Silvester, "Optimum Transmission Ranges in a Direct-Sequence Spread-Spectrum Multihop Packet Radio Network," *IEEE J. Sel. Areas Commun.*, vol. 8, no. 5, pp. 762–771, Jun. 1990.
- [38] M. Haenggi, "On Distances in Uniformly Random Networks," *IEEE Trans. on Information Theory*, vol. 51, no. 10, pp. 3584–3586, Oct. 2005.
- [39] R. K. Ganti and M. Haenggi, "Interference in Ad Hoc Networks with General Motion-Invariant Node Distributions," in *2008 IEEE International Symposium on Information Theory (ISIT'08)*, Toronto, Canada, Jul. 2007.
- [40] J.-P. M. G. Linnartz, "Exact Analysis of the Outage Probability in Multiple-User Radio," *IEEE Trans. Commun.*, vol. 40, no. 1, pp. 20–23, Jan. 1992.
- [41] M. Zorzi and S. Pupolin, "Optimum Transmission Ranges in Multihop Packet Radio Networks in the Presence of Fading," *IEEE Trans. Commun.*, vol. 43, no. 7, pp. 2201–2205, Jul. 1995.
- [42] F. Baccelli, B. Błaszczyszyn, and P. Mühlenthaler, "An ALOHA Protocol for Multihop Mobile Wireless Networks," *IEEE Transactions on Information Theory*, vol. 52, no. 2, pp. 421–436, Feb. 2006.
- [43] A. Hunter, J. G. Andrews, and S. Weber, "The transmission capacity of ad hoc networks with spatial diversity," *IEEE Trans. on Wireless Communications*, To Appear, 2008.
- [44] S. R. Broadbent and J. M. Hammersley, "Percolation processes i. crystals and mazes," in *Proceedings of the Cambridge Philosophical Society*, 1957, pp. 629–641.
- [45] P. D. Seymour and D. J. A. Welsh, "Percolation probabilities on the square lattice," *Ann. Discrete Math.*, vol. 3, pp. 227–245, 1978.
- [46] R. E. Peierls, "On ising's ferromagnet model," *Proc. Cam. Phil. Soc.*, vol. 32, pp. 477–481, 1936.
- [47] G. R. Grimmett and D. Stirzaker, *Probability and Random Processes*. Oxford University Press, 1992.
- [48] E. N. Gilbert, "Random plane networks," *SIAM J.*, vol. 9, pp. 533–543, 1961.
- [49] P. Balister, B. Bollobás, and M. Walters, "Continuum percolation with steps in the square of the disc," *Random Structures and Algorithms*, vol. 26, no. 4, pp. 392–403, Jul. 2005.
- [50] O. Häggstrom and R. Meester, "Nearest neighbor and hard sphere models in continuum percolation," *Random structures and algorithms*, vol. 9, no. 3, pp. 295–315, 1996.
- [51] M. Penrose, "On a continuum percolation model," *Advances in Applied Probability*, vol. 23, no. 3, pp. 536–556, 1991.
- [52] O. Dousse, F. Baccelli, and P. Thiran, "Impact of interferences on connectivity of ad hoc networks," in *Proc. IEEE Infocom*, vol. 1, San Francisco, Apr. 2003, pp. 476–486, ISSN: 0743-166X.
- [53] O. Dousse, M. Franceschetti, N. Macris, R. Meester, and P. Thiran, "Percolation in the signal to interference ratio graph," *Journal of Applied Probability*, vol. 43, no. 2, pp. 552–562, 2006.
- [54] M. Penrose and A. Pisztorá, "Large deviations for discrete and continuous percolation," *Advances in Applied Probability*, vol. 28, pp. 29–52, 1996.
- [55] P. Gupta and P. R. Kumar, "Critical power for asymptotic connectivity in wireless networks," *Stochastic Analysis, Control, Optimization and Applications: A Volume in Honor of W.H. Fleming*, 1998, edited by W.M. McEneaney, G. Yin, and Q. Zhang. (Eds.) Birkhuser.
- [56] P. Balister, B. Bollobás, A. Sarkar, and M. Walters, "Connectivity of random  $k$ -nearest neighbor graphs," *Adv. Appl. Prob.*, vol. 37, pp. 1–24, 2005.

- [57] J. G. Andrews, N. Jindal, M. Haenggi, R. Berry, S. Jafar, D. Guo, S. Shakkottai, R. Heath, M. Neely, S. Weber, and A. Yener, "Rethinking Information Theory for Mobile Ad Hoc Networks," *IEEE Communications Magazine*, vol. 46, no. 12, pp. 94–101, Dec. 2008.
- [58] P. Gupta and P. Kumar, "The capacity of wireless networks," *IEEE Trans. on Info. Theory*, vol. 46, no. 2, pp. 388–404, Mar. 2000.
- [59] S. R. Kulkarni and P. Viswanath, "A deterministic approach to throughput scaling in wireless networks," *IEEE Trans. on Information Theory*, vol. 50, no. 11, pp. 1041–1049, Jun. 2004.
- [60] M. Franceschetti, O. Dousse, D. N. C. Tse, and P. Thiran, "Closing the gap in the capacity of wireless networks via percolation theory," *IEEE Trans. on Info. Theory*, vol. 53, no. 3, pp. 1009–1018, March 2007.
- [61] L. Xie and P. R. Kumar, "A network information theory for wireless communication: Scaling laws and optimal operation," *IEEE Trans. on Info. Theory*, pp. 748–67, May 2004.
- [62] A. Jovicic, P. Viswanath, and S. Kulkarni, "Upper bounds to transport capacity of wireless networks," *IEEE Transactions on Information Theory*, vol. 50, no. 11, pp. 2555–2565, November 2004.
- [63] O. Leveque and I. E. Teletar, "Information-theoretic upper bounds on the capacity of large extended ad hoc wireless networks," *IEEE Trans. on Info. Theory*, pp. 858–65, Mar. 2005.
- [64] M. Franceschetti, "A note on Lévêque and Telatar's upper bound on the capacity of wireless ad hoc networks," *IEEE Trans. on Information Theory*, vol. 53, no. 9, pp. 3207–3211, Sep. 2007.
- [65] A. Özgür, O. Lévêque, and E. Preissmann, "Scaling laws for one- and two-dimensional random wireless networks in the low attenuation regime," *IEEE Trans. on Information Theory*, vol. 53, no. 10, pp. 3573–3585, Oct. 2007.
- [66] F. Xue, L. Xie, and P. R. Kumar, "The transport capacity of wireless networks over fading channels," *IEEE Trans. on Info. Theory*, pp. 834–47, Mar. 2005.
- [67] L.-L. Xie and P. Kumar, "On the path-loss attenuation regime for positive cost and linear scaling of transport capacity in wireless networks," to appear in *IEEE Transactions on Information Theory*, 2006.
- [68] T. M. Cover and J. A. Thomas, *Elements of Information Theory*. John Wiley & Sons, Inc., 1991.
- [69] S. Aeron and V. Saligrama, "Wireless Ad hoc Networks: Strategies and Scaling Laws for the fixed SNR Regime," *IEEE Trans. on Information Theory*, vol. 53, no. 6, pp. 2044–2059, Jun. 2007.
- [70] A. Ozgur, O. Leveque, and D. Tse, "Hierarchical cooperation achieves optimal capacity scaling in ad hoc networks," *IEEE Trans. on Info. Theory*, vol. 53, no. 10, pp. 3549–3572, Oct. 2007.
- [71] M. Franceschetti, M. Migliore, and P. Minero, "The capacity of wireless networks: Information-theoretic and physical limits," *IEEE Trans. on Info. Theory*, Submitted, available at: <http://circuit.ucsd.edu/~massimo/>.
- [72] S. Weber, X. Yang, J. G. Andrews, and G. de Veciana, "Transmission capacity of wireless ad hoc networks with outage constraints," *IEEE Trans. on Info. Theory*, vol. 51, no. 12, pp. 4091–4102, Dec. 2005.
- [73] S. Weber, J. G. Andrews, and N. Jindal, "The effect of fading, channel inversion, and threshold scheduling on ad hoc networks," *IEEE Trans. on Info. Theory*, vol. 53, no. 11, pp. 4127 – 4149, Nov. 2007.
- [74] S. Govindasamy, D. W. Bliss, and D. H. Staelin, "Spectral efficiency in single-hop ad-hoc wireless networks with interference using adaptive antenna arrays," *IEEE Journal on Sel. Areas in Communications*, vol. 25, no. 7, pp. 1358–69, Sep. 2007.
- [75] R. K. Ganti and M. Haenggi, "Interference and outage in clustered wireless ad hoc networks," *IEEE Trans. on Info. Theory*, Submitted, available at [arxiv.org/abs/0706.2434](http://arxiv.org/abs/0706.2434).
- [76] A. Hasan and J. G. Andrews, "The guard zone in wireless ad hoc networks," *IEEE Trans. on Wireless Communications*, vol. 6, no. 3, Mar. 2007.
- [77] S. Weber, J. G. Andrews, X. Yang, and G. de Veciana, "Transmission capacity of wireless ad hoc networks with successive interference cancellation," *IEEE Trans. on Info. Theory*, vol. 53, no. 8, pp. 2799–2814, Aug. 2007.
- [78] K. Huang, J. G. Andrews, R. W. Heath, D. Guo, and R. Berry, "Spatial interference cancellation for multi-antenna mobile ad hoc networks," *IEEE Trans. on Info. Theory*, Submitted, available at [arxiv.org/abs/0804.0813](http://arxiv.org/abs/0804.0813).
- [79] A. F. Dana, R. Gowaikar, R. Palanki, B. Hassibi, and M. Effros, "Capacity of wireless erasure networks," *IEEE Trans. on Info. Theory*, vol. 52, no. 3, pp. 789– 804, Mar. 2006.
- [80] A. S. Avestimehr, S. Diggavi, and D. Tse, "A deterministic approach to wireless relay networks," <http://arxiv.org/abs/0710.3777>.
- [81] V. R. Cadambe and S. A. Jafar, "Interference alignment and degrees of freedom of the  $k$ -user interference channel," *IEEE Trans. on Info. Theory*, vol. 54, no. 8, pp. 3425–41, Aug. 2008.
- [82] F. Baccelli and C. Bordenave, "The radial spanning tree of a poisson point process," *Annals of Applied Probab.*, vol. 17, no. 1, pp. 305–359, 2007.
- [83] M. Haenggi, "On Routing in Random Rayleigh Fading Networks," *IEEE Transactions on Wireless Communications*, vol. 4, no. 4, pp. 1553–1562, Jul. 2005.
- [84] F. Baccelli, B. Błaszczyszyn, and P. Mühlethaler, "On the performance of time-space opportunistic routing in multihop mobile ad hoc networks," in *WiOPT*, Berlin, 2008.
- [85] Z. J. Haas, J. Y. Halpern, and L. Li, "Gossip-based ad hoc routing," *IEEE/ACM Trans. Netw.*, vol. 14, no. 3, pp. 479–491, Jun. 2006.
- [86] Y. Sasson, D. Cavin, and A. Schiper, "Probabilistic broadcast for flooding in wireless mobile ad hoc networks," in *Proc. IEEE WCNC*, New Orleans, Mar. 2003.
- [87] P. B. Godfrey and D. Ratajczak, "Naps: scalable, robust topology management in wireless ad hoc networks," in *Proc. IPSN*, 2004.
- [88] H. Kesten, "Percolation theory and first passage percolation," *The Annals of Probability*, vol. 15, no. 4, pp. 1231–1271, 1986.
- [89] M. Deijffen, "Asymptotic shape in a continuum growth model," *Advances in Applied Probability*, vol. 35, no. 2, pp. 303–318, 2003.
- [90] O. Dousse, P. Mannersalo, and P. Thiran, "Latency of wireless sensor networks with uncoordinated power saving mechanisms," in *Proc. ACM Mobihoc*, Tokyo, May 2004, pp. 109–120.
- [91] M. Haenggi, "A Geometric Interpretation of Fading in Wireless Networks: Theory and Applications," *IEEE Trans. on Information Theory*, vol. 54, no. 12, pp. 5500–5510, Dec. 2008.
- [92] —, "The Secrecy Graph and Some of its Properties," in *2008 IEEE International Symposium on Information Theory (ISIT'08)*, Toronto, Canada, Jul. 2008.